

Mechanical Data

Mounting position

Any

For visual indication the tube is viewed through the dome of the bulb.

Alignment

Cathode "O" is aligned with pin 6 to an accuracy of $\pm 12^\circ$.




Weight
Escutcheons

43 g (nominal)
N.78211 Bakelite, or
N.79368 Brass

Base

I.O.

Base Connections
(underside view)

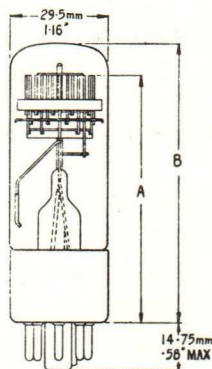

- Pin 1 Common cathodes
2 —
3 1st Guides
4 Anode
5 2nd Guides
6 —
7 Cathode "O"
8 —

Dimension	Nominal	GC10B		GC10B/S	
		Min.	Max.	Min.	Max.
A	72.5 mm. (2.85")	68.5 mm.	76.5 mm.	69.5 mm.	75.5 mm.
B	85 mm. (3.35")	81.5 mm.	88.5 mm.	82.5 mm.	87.5 mm.