

Scale-of-ten Counter
Specially processed for long life

GC 10B/L, GC 10/4B/L
(CV.6044) (CV.6100)

Mechanical Data

Mounting position

Any

Alignment

For visual indication the tube is viewed through the dome of the bulb.



Escutcheons

Cathode "O" is aligned with pin 6 to an accuracy of $\pm 12^\circ$.

Base


N78211 Bakelite, or
N79368 Brass

Base Connections
(underside view)

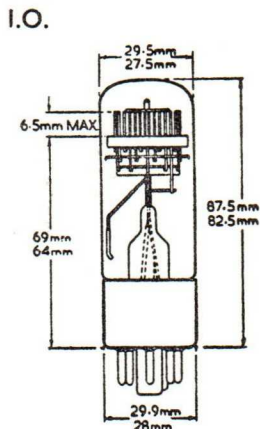

GC 10 B/L

- Pin 1 Common cathodes
2 —
3 1st Guides
4 Anode
5 2nd Guides
6 —
7 Cathode "O"
8 —



GC 10/4 B/L

- Pin 1 Common cathodes
2 Cathode "5"
3 1st Guides
4 Anode
5 2nd Guides
6 Cathode "9"
7 Cathode "0"
8 Cathode "3"

